

G SERIES-GC1

20.08" x 19.29" x 33.07"
51cm x 49cm x 84cm



Specifications

- Water Access: Plumbed

Plumbing Requirements

PSI	kPa	Fitting Supplied
30-60	207-414	3/8"BSPP

► Under Counter Design

With a modern design- streamline appearance; The Under Counter Design not only makes the drink making process transparent but also eliminates barriers between the barista and customer. The customer does not only taste the perfectly made beverage, but can also enjoy the human interaction.

► Stainless Steel Boiler

The stainless steel boiler helps maintain the temperature and quality of the water, and ensures sanitary conditions.

► Energy Saving

With Low wattage, saves energy and electricity.

► Automatic Cleaning

An Independent auto-cleaning function makes cleaning and maintaining the machine easy.

► Keyboard Panel with Precise Temperature Controls

Multiple temperature controls allows for precise temperature monitoring when brewing different types of materials. In combination with the multi-infusion function, each machine can have up to 10 infusion sections and can extract tea with varying degrees of concentration.

► Professional Portafilters

1 Single Coffee Portafilter
1 Double Coffee Portafilter


Electrical & Capacity

Brewing System	Boiler Volume	Voltage	Ampere	Watts	Hertz	# Wires plus Ground	Input H ² O Temp.	Phase	Cord Attached
1 Coffee	6L*1	220/240 Vac	11A	2500W	50/60	3	77°F (25°C)	1	Yes

UNDER COUNTER MACHINE

GC1

Single Group Head
Espresso Machine

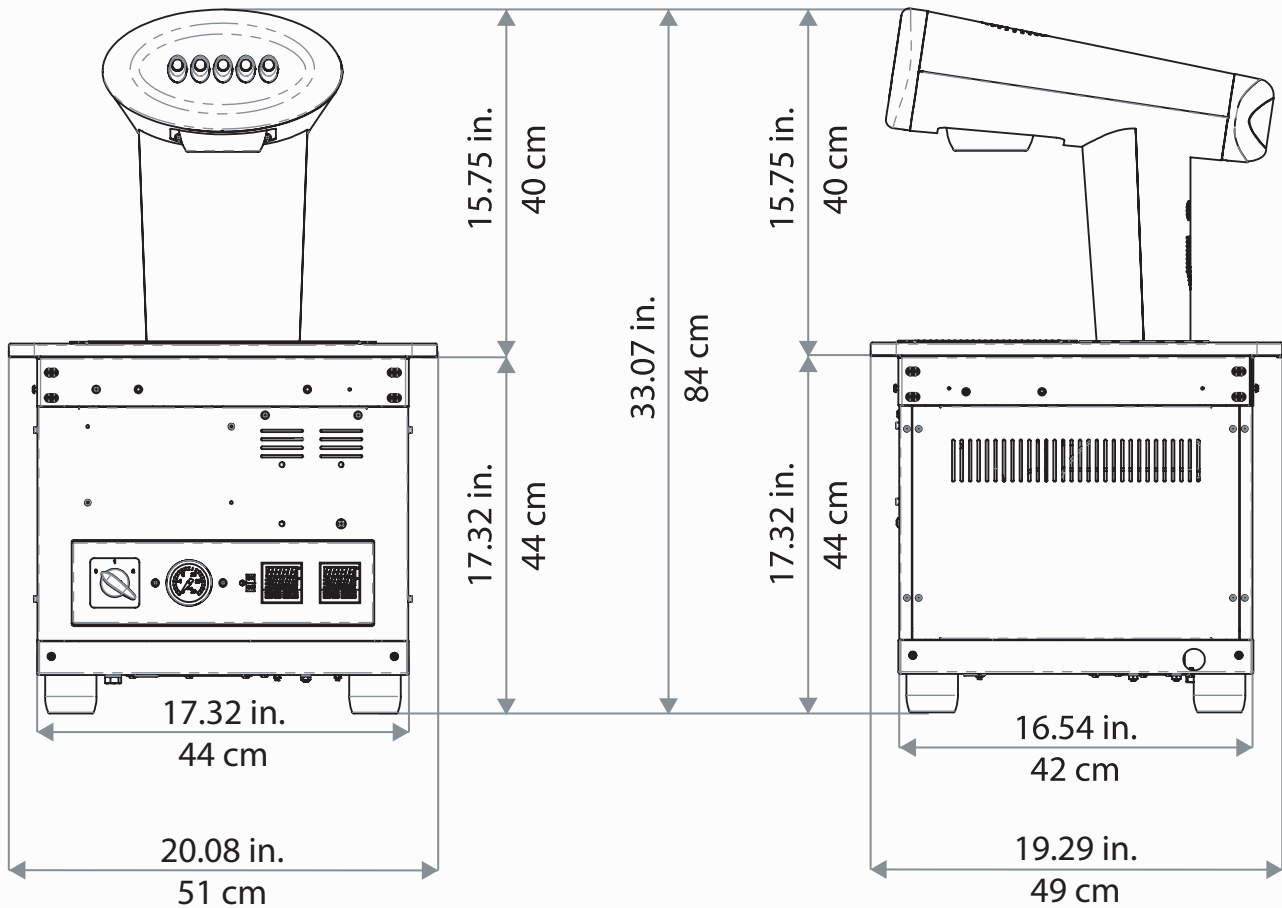

Specification

GC1	Unit				Shipping			
	Width	Depth	Height	Weight	Width	Depth	Height	Weight
English	20.08 in.	19.29 in.	15.75 + 17.32 / in.	110.23 lbs	26.77 in.	28.35 in.	41.73 in.	143.30 lbs
Metric	51 cm	49 cm	40 + 44 /cm	50 kg	68 cm	72 cm	106 cm	65 kg